Renegade

Find out why more fleets and owner operators run with Fontaine® than ever before!




- True 30 ton capacity in 16 feet, 35 tons evenly distributed (GAWR and tire ratings determine legal payloads)
- Loaded deck height: 15" at front and rear with 6" ground clearance (14" center height with 5" ground clearance)
- Mechanical, removable gooseneck with fifth wheel guide rollers
- 81" swing radius with 9' 10" overall gooseneck length
- Flat, level deck with 29' 2" clear deck length
- Sloped front ramp features traction cleats for easier loading and unloading
- Air-ride suspension with automatic and manual controls
- ... and so much more. See your local Fontaine Heavy-Haul Dealer today and let's get to work!





www.fontaineheavyhaul.com

Fontaine Renegade LXL Lowbed Specifications

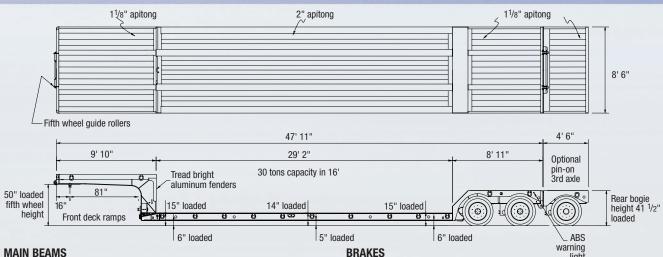

· All main longitudinal members fabricated with 100 KSI minimum yield steel flanges with 50,000 lb webs

• 35 tons evenly distributed and 30 tons in 16' (GAWR and tire ratings determine legal payloads)

LOAD BASE

. 16' rigid 2-point load centered in deck

LOADED FIFTH WHEEL HEIGHT

· Figure-eight plate features 50" loaded height

GOOSENECK

- · Mechanical removable design with fifth wheel guide rollers (hydraulic gooseneck model also available)
- Full-width gooseneck platform for greater loading space with 1 1/8" apitong or equivalent flooring
- J560 7-pin electrical connector

DECK DESIGN

- 15" loaded deck height with 6" ground clearance
- Front of deck is sloped and features traction cleats to make loading and unloading easier
- Full-width 2" nominal apitong or equivalent flooring
- Crossmembers on 24" centers for greater strength and durability

BOGIE DESIGN

- Covered rear bogie platform with 1 1/8" apitong or equivalent
- Fixed deck-to-bogie connection with full-width bogie ramp Connections for future axle (including air and electrical)

- 2 heavy-duty axles with 50" spread
- Air/electrical connections in place for easy third axle connection
- · 25,000 lbs nominal capacity per axle (GAWR determined by suspension type, brakes, tires and other components)
- Tapered spindle axles, automatic slack adjusters and spring brakes

2S/2M ANTILOCK BRAKE SYSTEM

- · ABS wired to center pin of 7-way socket
- · Electronic sensors at every wheel end
- · Virtually eliminates tire flat-spotting

Specifications subject to change without notice. Photos show some optional equipment.



- · Spring brakes (2 axles)
- 16 1/2" x 7" with 5 1/2" autoslacks
 Heavy-duty brake drums, outboard mount
- Quick change replacement feature saves repair time
- Automatic slack adjusters maintain positive braking action

- · Hub-piloted 10-stud mount for increased capacity and durability
- · Outboard cast drums save time and cost on brake repairs

WHEELS/TIRES

8.25 x 22.5 steel disc wheels with 255/70R 22.5 H-ply tires

- Unitized air-ride suspension with automatic and manual controls
- Suspension mount is engineered, reinforced and braced to virtually eliminate frame cracking

ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- · DOT sealed beam with LED lights
- 7 marker lights per side including mid-turn signal
- . 3 stop, tail and turn lights per side on rear

PROTECTIVE COATING

- · Highest quality 2-part polyurethane enamel fights corrosion to extend the life of your trailer
- · Shot blasted and cleaned prior to painting
- Primed for better paint adhesion

LASH RINGS 28 total including 8 D-Ring type on upper decks and 20 bent D-Ring type on lower deck for longer chain life and better payload securement

FLAG HOLDERS

• 3 pair (6 total)

ACCENT PACKAGE

- Aluminum fenders at rear of gooseneck
- Stainless steel bumper insert
- Stainless steel laser-cut Renegade logo panel

ESTIMATED EMPTY WEIGHT W/O OPTIONS: $18,390 \text{ lbs} \pm 3\%$

