WORKHORSE 50

NEW 50-FLD • Flat Level Deck • Hydraulic gooseneck • Fixed bogie




The durability you need. The performance


you demand.

50 tons capacity in 12 ft.
52 tons frame capacity in 16 ft.
(Configuration, GAWR, and tire ratings determine legal payloads)

Fastest, most versatile hydraulic removable gooseneck in the industry ... You can connect or disconnect on uneven ground!

- 5-Position front ride-height adjustment
- 20" loaded deck height with 6" ground clearance
- 102" swing radius for easy maneuverability
- 24 ft. clear deck length-use every inch
- Boom trough with V-pan in bogie helps you get under bridges
- 5-Position mechanical ride height control system and dump valve for added convenience
- LED lights, strobes, and D-rings are all standard to give you more trailer for your money








www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice

Fontaine Workhorse™ 50 FLD Specifications

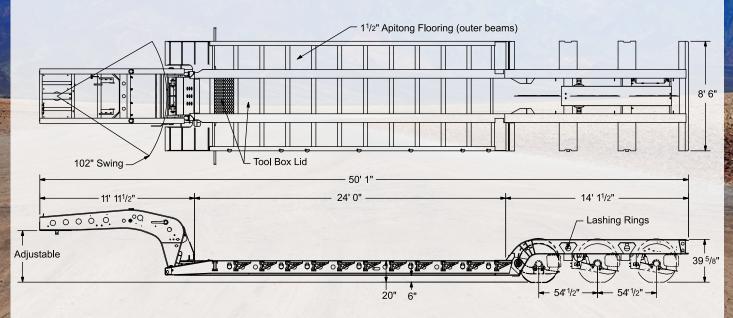

CAPACITY

50 tons capacity in 12'
 52 tons frame capacity in 16'
 (Configuration, GAWR, and tire ratings determine legal payloads))

MAIN BEAMS

 All main longitudinal members fabricated with 100 KSI minimum yield steel flanges with 50,000 lb. webs

GOOSENECK FEATURES

- · Hydraulic removable non-ground bearing
- 5-Position front ride-height adjustments (dual cam pawl option available for 7-Positions)
- 50" loaded fifth wheel height
- 102" swing radius
- Set up for wet line operation (optional gasoline powered auxiliary power unit available)
- · J560 7-pin electrical connector

DECK FEATURES

- 8' 6" overall width
- · 24' clear deck length
- 20" loaded deck height with 6"ground clearance
- 11/2" apitong flooring on side rails
- Two fully covered tool box trays with lockable covers in front of deck between mainbeams
- Manual front approach ramps standard (optional hinged front approach ramps with risers available)
- · Extension brackets:
 - 12 pair (24 total) removable swing type
 - 1 pair (2 total) heavy-duty removable hook-on type
- Fixed deck to bogie connection

BOGIE FEATURES

- 3 axle bogie (dust shield option available)
- 25,000 lbs. nominal capacity per axle (GAWR determined by suspension type, brakes, tires and other components)
- Axle spread: 54.5" between axle centers (optional 60" axle spead available)
- Recessed load bearing bolsters between all axles and rear of last axle (optional load bearing wheel covers available)
- Unitized air-ride suspension with automatic and manual controls
- Air-lift third axle
- 5-Position rear ride-height control system with mechanical control valve
- Manual dump valve (Push/Pull)
- · V-style boom trough with bolt-in V pan
- · Heavy duty V-style rear bumper
- Rear Bogie Height: 40" to top flange
- Bogie width: 8' 6"

BRAKES (continued)

- 16 1/2" x 7" brakes with 5 1/2" autoslacks
- · Heavy-duty brake drums, outboard mount



BRAKES (continued)

- · Quick change replacement feature
- · Automatic slack adjusters
- · 4S2M ABS optional

WHEELS/TIRES

- Wheels: 8.25 x 22.5 steel disc, hub-piloted (optional aluminum wheels available)
- Tires: 255/70R 22.5 0EM Standard

ELECTRICAL SYSTEM

- Sealed harness for maximum corrosion resistance
- . DOT sealed beam with LED lights
- 4" flush mounted, battery powered amber strobes

PROTECTIVE COATING

- Highest quality 2-part polyurethane enamel fights corrosion to extend the life of your trailer
- · Primed for better paint adhesion

LASH RINGS

 18 total D-Rings; 9 pair bent type for longer chain life and better securement

FLAG HOLDERS

· Located at front of deck and on rear bumper

ESTIMATED EMPTY WEIGHT W/O OPTIONS

18,720 lbs. ± 3%

Specifications subject to change without notice. Photos show some optional equipment.

www.fontaineheavyhaul.com

Fontaine Heavy-Haul • 5398 US Highway 11 • Springville, AL 35146 • 205-467-6171

Weights shown are without options • Photos may show some optional equipment • Specifications subject to change without notice